


CHILD RESTRAINT SYSTEM INFORMATION

MODEL **906a (Lambada)**

GROUP **0+ / 1 / 2 / 3**

BRAND **KOOPERS**

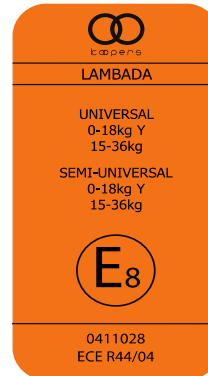

0040074


UNR TESTING INFORMATION

Regulation	ECE R44/04
Approval Number	E4-44R-0411028
CTA Reference Number	JPJ.BKA.600-3/3/33 Jld 51 (30)
CTA Approval Date	23 DECEMBER 2019

INSTALLATION TYPE

Installation Type/ Direction	Seatbelt	ISOFIX	Top Tether	Support Leg
Rear Facing	✓	N/A	N/A	N/A
Forward Facing	✓	N/A	N/A	N/A

PHOTOS

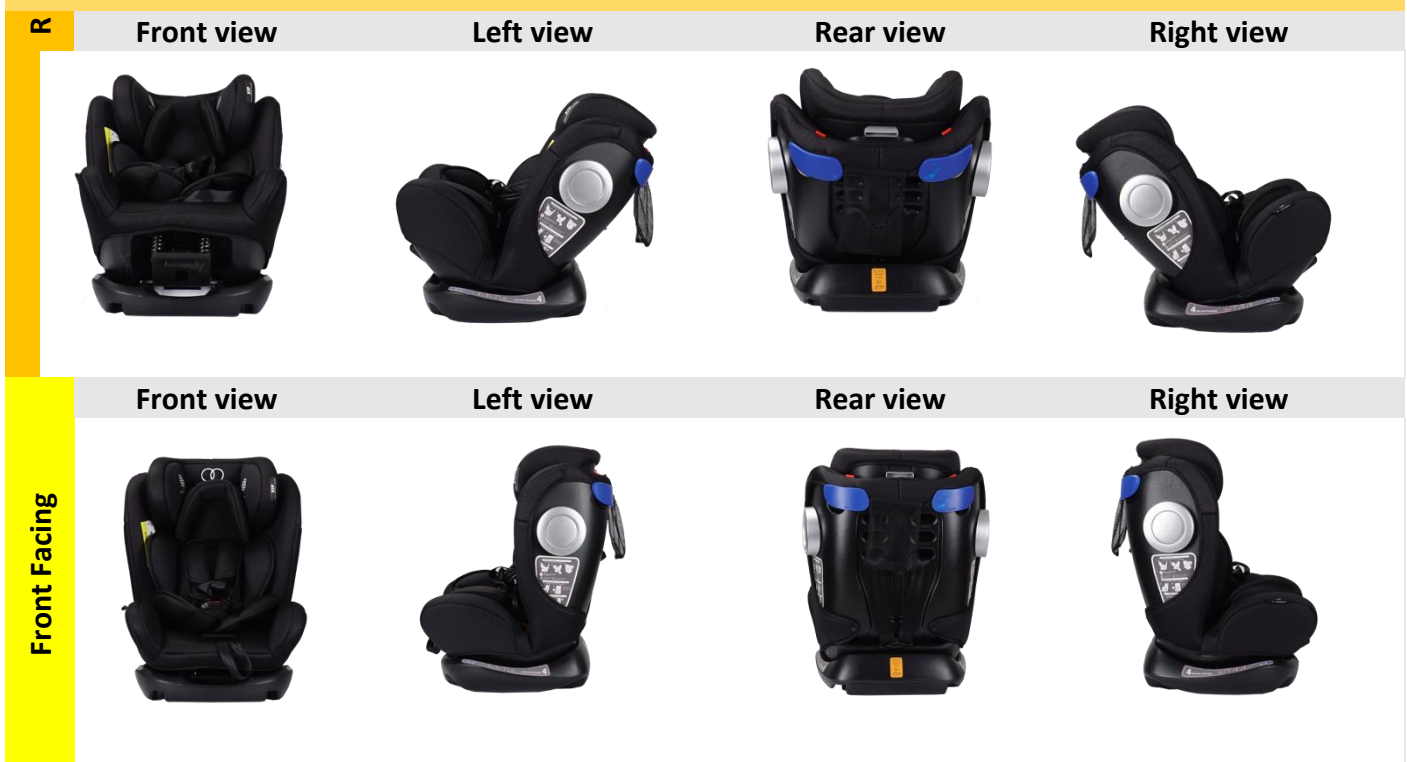

CHILD RESTRAINT SYSTEM INFORMATION

COLOUR VARIANT



INSTALLATION

Group

Installation Method

0/0+
Up to 83cm
0-13kg

7. Instruction

7.1 Group 0 +(0-13kg) installed in the rearward facing position with vehicle belt+5 point harness

7.1.1 Pull the vehicle seat belt and pass the lap belt section through the red belt guidance and under the sleeping cushion.

7.1.2 Pass the diagonal seat belt section through the blue guidance on the back of the child seat.

7.1.3 Fasten the seat belt and pull it tight, ensure that the seat belt is not twisted.

Note:


1. The child seat must only be installed in the rearward facing position and angle of maximum inclination (Fourth lever). For be sure the car seat has been installed in the right place, please shake it before use.

2. Don not twist the belt!

3. Ensure the buckle tongues engage in the vehicle seat buckle, you will hear an audible **CLICK!**


Follow the steps in section securing your child with 5-point harness.

Diagonal seat belt section



Lap belt section

Diagonal seat belt section



Lap belt section

CHILD RESTRAINT SYSTEM INFORMATION

EN

instruction

7.2 Group 1(9–18kg) installed in the forward facing position with vehicle belt+5 point harness

To secure the child seat using the 3–point belt of your vehicle proceed as follows:

7.2.1 Place the child seat forward facing on the vehicle seat (in the direction of travel).

7.2.2 Place the diagonal seat belt section through between headrest and backrest.

CAUTION! Do not twist the belt.

7.2.3 Place the lap belt section in the light red belt guides.

CAUTION! Do not twist the belt.

7.2.4 Bring together about 80cm of the diagonal seat belt section and lap belt section.

7.2.5 Ensure the buckle tongues engage in the vehicle seat buckle, you will hear an audible

CLICK!


7.2.6 Using your knee to press the child seat, tighten the vehicle seat belt as follows:

First pull on the lower part of the diagonal seat belt section near the vehicle seat buckle

1
71cm and above
9-18kg



CHILD RESTRAINT SYSTEM INFORMATION



2

100cm and above
15-25kg

7.3 Group 2, 3(15–36kg) installed in the forward facing position with vehicle belt

Note: Must remove the 5–point safety seat belt and sleeping pad before use this group seat.

7.3.1 Guide the diagonal seat belt section into the light red belt guidance of the headrest until it lies completely in the belt guidance and is not twisted.

Note: Make sure that the diagonal seat belt section runs over your child’s shoulder bone, and not in front of his or her neck

7.3.2 Place the diagonal seat belt section and lap belt section on the side of the vehicle seat belt buckle through the belt guide of the child safety car seat with a **CLICK** noise.

CAUTION! The diagonal seat belt section must run diagonally backward. You can adjust the course of the belt with your vehicle’s adjustable belt deflector on both side.

7.3.3 Shack the child safety car seat to make sure it is safety attached.

7.3.4 Engage the buckle tongue in the vehicle seat buckle **CLICK!**

7.3.5 Place the lap belt section on the other side of

the child seat in the light red belt guide.

CAUTION! The lap belt section must lie as low as possible over your child’s hips on both sides.

7.3.6 Guide the diagonal seat belt section into the red belt holder of the headrest until it lies completely in the belt holder and is not twisted.



7.3 Group 2, 3(15–36kg) installed in the forward facing position with vehicle belt

Note: Must remove the 5–point safety seat belt and sleeping pad before use this group seat.

7.3.1 Guide the diagonal seat belt section into the light red belt guidance of the headrest until it lies completely in the belt guidance and is not twisted.

Note: Make sure that the diagonal seat belt section runs over your child’s shoulder bone, and not in front of his or her neck

7.3.2 Place the diagonal seat belt section and lap belt section on the side of the vehicle seat belt buckle through the belt guide of the child safety car seat with a **CLICK** noise.

CAUTION! The diagonal seat belt section must run diagonally backward. You can adjust the course of the belt with your vehicle’s adjustable belt deflector on both side.

7.3.3 Shack the child safety car seat to make sure it is safety attached.

7.3.4 Engage the buckle tongue in the vehicle seat buckle **CLICK!**

7.3.5 Place the lap belt section on the other side of

the child seat in the light red belt guide.

CAUTION! The lap belt section must lie as low as possible over your child’s hips on both sides.

7.3.6 Guide the diagonal seat belt section into the red belt holder of the headrest until it lies completely in the belt holder and is not twisted.



3

Up to 135cm
25-36kg