

CHILD RESTRAINT SYSTEM INFORMATION

MODEL **AY518 (NEXUS)**

GROUP **0+ / I / II / III**

BRAND **CROLLA**



0090290


UNR TESTING INFORMATION

Regulation	ECE R44/04
Approval Number	E8*44R04/14*10684*01
CTA Reference Number	JPJ.BKA.600-3/3/33 Jld 70 (28)
CTA Approval Date	5 AUGUST 2020

INSTALLATION TYPE

Installation Type/ Direction	Seatbelt	ISOFIX	Top Tether	Support Leg
Rear Facing	✓	N/A	N/A	N/A
Forward Facing	✓	N/A	N/A	N/A

PHOTOS

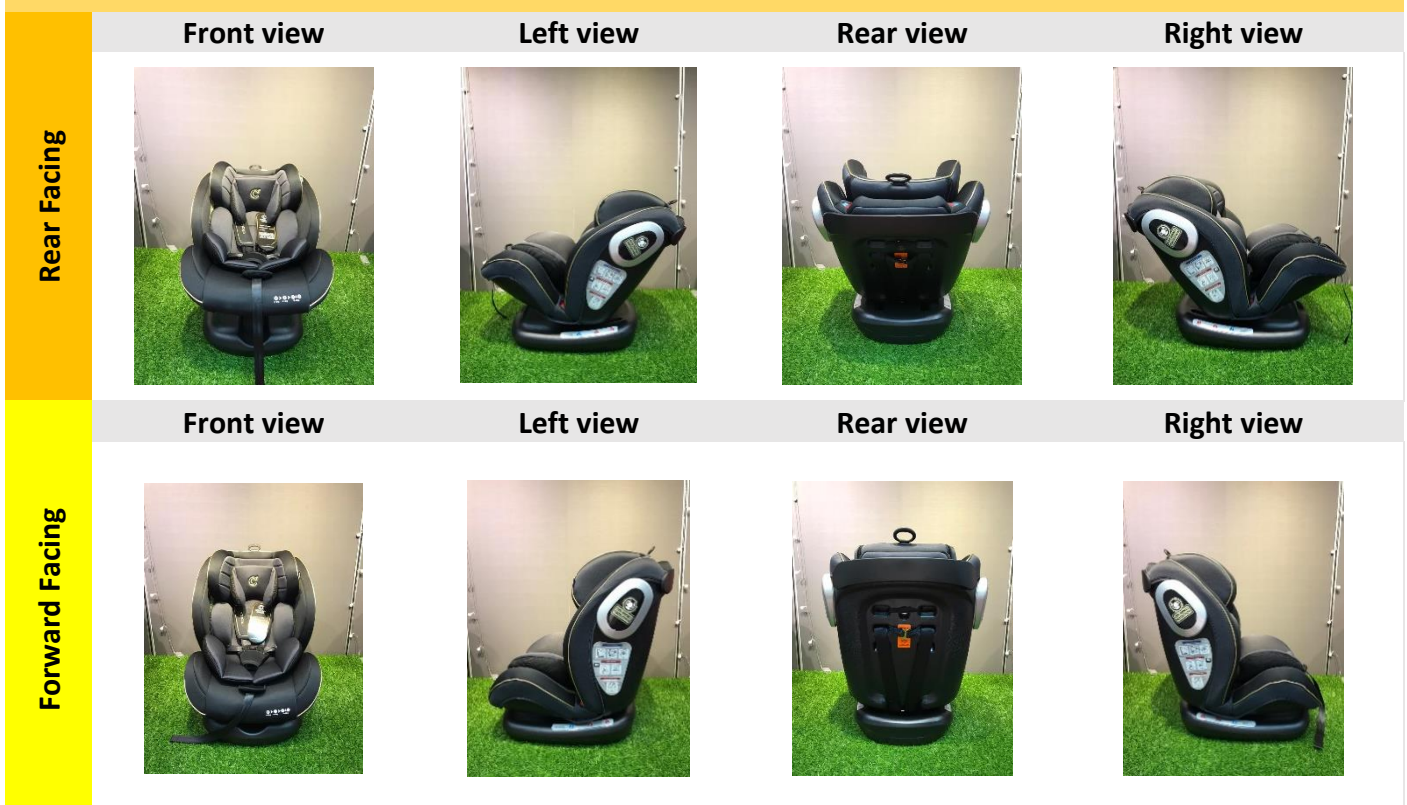

CHILD RESTRAINT SYSTEM INFORMATION

COLOUR VARIANT



INSTALLATION

Group

Installation Method

0/0+
Up to 83cm
0-13kg



- Step 1: Adjust the seat to rear facing position (position 3), place the child seat on the car seat and make sure that the car seat is firmly pressed against the car seat backrest.



- Step 2: Remove infant insert, pass the waist belt over seat slots, and then engage the vehicle buckle tongue into the buckle.



- Step 3: Fasten the shoulder belt in the shoulder-belt slots at the back of the body. Place infant insert back to the car seat.



- Step 4: Place your child into safety seat. Check the height of the shoulder straps on the correct position and fasten the buckle. (see 4.3,4.4,4.5)

1
71cm and above
9-18kg



- Step 1: Place the child seat on the car seat forward-facing and make sure that the front of the child seat is firmly pressed against the car seat backrest.



- Step 2: Pass waist belt through seat slots.



- Step 3: Fasten buckle and pull the vehicle belt to tighten. Check the height of the harness is in the correct position and then fasten the buckle.

2
100cm and above
15-25kg



- Step 1: Place the child seat on the car seat forward-facing and make sure that the front of the child seat is firmly pressed against the car seat backrest.



- Step 2: Seat your child into safety seat. Check the height of the shoulder straps on the correct position (see 4.5). Follow the path showing in the picture. Position shoulder belt through shoulder belt guide, pass waist belt through seat slots. Fasten buckle and pull the vehicle belt to tighten.

CHILD RESTRAINT SYSTEM INFORMATION

3

Up to 135cm
22-36kg



- Step 1: Place the child seat on the car seat forward-facing and make sure that the front of the child seat is firmly pressed against the car seat backrest.



- Step 2: Seat your child into safety seat, Check the height of the shoulder straps on the correct position (see 4,5). Follow the path showing in the picture, Position shoulder belt through shoulder belt guide, pass waist belt through seat slots. Fasten buckle and pull the vehicle belt to tighten.