

CHILD RESTRAINT SYSTEM INFORMATION

MODEL **AY373 (ALPHA)**

GROUP **0+ / I / II**

BRAND **CROLLA**



0090291

UNR TESTING INFORMATION

Regulation	ECE R44/04
Approval Number	E8*44R04/16*11721*00
CTA Reference Number	JPJ.BKA.600-3/3/33 Jld 70 (18)
CTA Approval Date	5 AUGUST 2020

INSTALLATION TYPE

Installation Type/ Direction	Seatbelt	ISOFIX	Top Tether	Support Leg
Rear Facing	✓	N/A	N/A	N/A
Forward Facing	✓	N/A	N/A	N/A

PHOTOS



CHILD RESTRAINT SYSTEM INFORMATION

COLOUR VARIANT



INSTALLATION

Group

Installation Method

0/0+
Up to 83cm
0-13kg



Step1: Adjust the child seat to position 4. (see point 3.5 of page 5)



Step2: Place the child seat on the car seat rearward-facing and make sure that the front of the child seat is firmly pressed against the car seat backrest.



Step 3: Fasten the belts in the rearward blue safety-belt slots at the back of the body. Shoulder belt must pass through the rearward safety-belt slot. Fasten the belt.



Step 4: Open the lock-off device and insert the safety belt through it. While pressing the child seat, pull the belts to fasten the child seat tightly and securely. Lastly, slip the belt in to the hook.



Step5: Place your child into the child seat. Check the height of the shoulder straps on the correct position and fasten the buckle. Check that the harness has not become twisted and also check that the cover is not impeding the movement or fit of the harness in any way .

CHILD RESTRAINT SYSTEM INFORMATION

1
71cm and above
9-18kg



Step1: Adjust the child seat to position 4. (see point 3.5 of page 5)



Step2: Place the child seat on the car seat rearward-facing and make sure that the front of the child seat is firmly pressed against the car seat backrest.



Step 3: Fasten the belts in the rearward blue safety-belt slots at the back of the body. Shoulder belt must pass through the rearward safety-belt slot. Fasten the belt.



Step 4: Open the lock-off device and insert the safety belt through it. While pressing the child seat, pull the belts to fasten the child seat tightly and securely. Lastly, slip the belt in to the hook.



Step5: Place your child into the child seat. Check the height of the shoulder straps on the correct position and fasten the buckle. Check that the harness has not become twisted and also check that the cover is not impeding the movement or fit of the harness in any way .

OR





Step1: Place the child seat on the car seat forward-facing and make sure that the backrest of the child seat is firmly pressed against the car seat backrest.




Step 2: Fasten the belts in the forward red safety-belt slots at the back of the body. Shoulder belt must pass through the safety-belt slot. Fasten the belt.

CHILD RESTRAINT SYSTEM INFORMATION

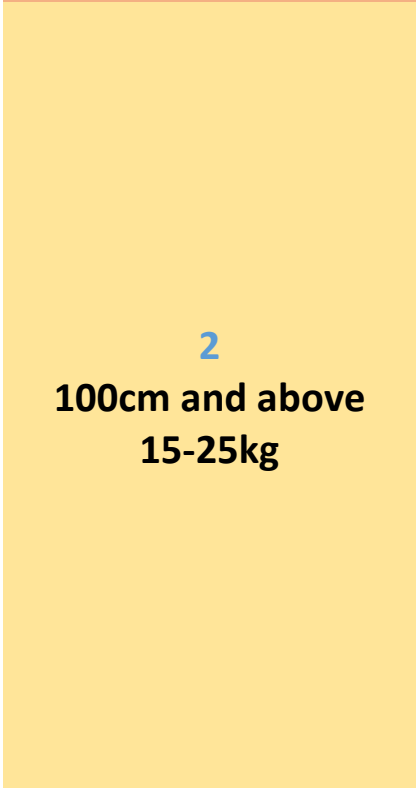

2
100cm and above
15-25kg



Step 3: Open the lock-off device and insert the safety belt through it. While pressing the child seat, pull the belts to fasten the child seat tightly and securely.



Step4: Place your child into the child seat. Check the height of the shoulder straps on the correct position and fasten the buckle. Check that the harness has not become twisted and also check that the cover is not impeding the movement or fit of the harness in any way .



Step1. Place the child safety seat on the vehicle's seat ensuring it is firmly pressed against the car seat backrest.



Step2. Place the child in the child safety seat.



Step 3: Position shoulder belt through shoulder belt guide, pass waist belt through seat slots. Fasten buckle and pull the vehicle belt to tighten