

# CHILD RESTRAINT SYSTEM INFORMATION

**MODEL** i-SIZE NEX360 (AY819T)

**GROUP** i-SIZE (40CM – 150CM)

**BRAND** CROLLA



0090551

## UNR TESTING INFORMATION

|                      |                                |
|----------------------|--------------------------------|
| Regulation           | ECE R129                       |
| Approval Number      | E8*129R03/08*14554*00          |
| CTA Reference Number | JPJ.BKA.600-3/3/33 Jld 305(47) |
| CTA Approval Date    | 4 MARCH 2024                   |

## INSTALLATION TYPE

| Installation Type/ Direction | Seatbelt | ISOFIX | Top Tether | Support Leg |
|------------------------------|----------|--------|------------|-------------|
| Rear Facing                  | N/A      | ✓      | ✓          | N/A         |
| Forward Facing               | N/A      | ✓      | ✓          | N/A         |

## PHOTOS

|                | Front view | Left view | Rear view | Right view |
|----------------|------------|-----------|-----------|------------|
| Rear Facing    |            |           |           |            |
| Forward Facing |            |           |           |            |

# CHILD RESTRAINT SYSTEM INFORMATION

## COLOUR VARIANT



Cloudy Grey



Cherry Red




Gold

## INSTALLATION

### Group

### Installation Method

40cm – 83cm



#### Step 1:

Extend the ISOFIX attachments on both sides and clip into the ISOFIX anchor points in the car until you hear a "click" sound. Make sure that the ISOFIX indicator turns to GREEN.

Then, push the child seat until it is tight against the car seat.



#### Step 2:

Press the rotation adjuster and turn the child seat to rearward facing position. When you hear a "click" sound, that means it is locked.

**Pay attention!!**  
Do not drive when the safety seat is positioned at a 90° angle.



#### Step 3:

Extend the top tether strap to a suitable length, and then clip the top tether connector to the top tether anchorage of the car seat.



#### Step 4:


Place the child on the child seat and insert the buckle into the buckle slot until you hear a "click" sound. Then, tighten the harness by pulling the harness adjuster strap.

**\*The harness should be adjusted as tightly as possible without causing discomfort to your child. A loose harness can be dangerous.**

**\*Check the harness adjuster and tighten each time when the child is placed in the seat.**


# CHILD RESTRAINT SYSTEM INFORMATION

71cm to 105cm

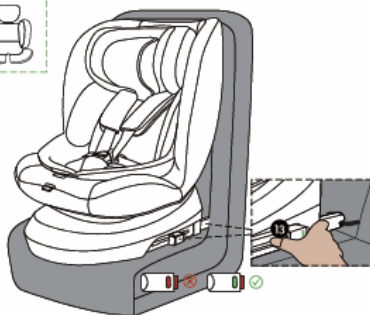

## Step 1:

Extend the ISOFIX attachments on both sides and clip into the ISOFIX anchor points in the car until you hear a "click" sound.

Make sure that the ISOFIX indicator turns to GREEN. 

Then, push the child seat until it is tight against the car seat.



## Step 2:

Extend the top tether strap to a suitable length, and then clip the top tether connector to the top tether anchorage of the car seat.



## Step 3:

Place the child on the child seat and insert the buckle into the buckle slot until you hear a "click" sound. Then, tighten the harness by pulling the harness adjuster strap.

\*The harness should be adjusted as tightly as possible without causing discomfort to your child. A loose harness can be dangerous.

\*The crotch strap should be as low as possible and should be located close to the crotch, not the abdomen.


\*To ensure the comfort of your child, the safety belt must not be twisted.



\*100-150cm. please remove the cushion padding, crotch pad, buckle, shoulder pad and the shoulder straps.

100cm to 150cm



Extend the ISOFIX attachments on both sides and clip into the ISOFIX anchor points in the car until you hear a "click" sound. Make sure that the ISOFIX indicator turns to GREEN. 

Then, push the child seat until it is tight against the car seat.

Place the child on the child seat and adjust the headrest according to the child's height.

Pull out the 3 point seat belt then pass through the shoulder belt guide of the headrest and the lap belt must pass through the lap belt guidings. Finally, you can buckle it.